

## Outputs



### Selected model

### MPE015-C

#### Cooling @15/10°C;27°C;

Cooling capacity	kW	18,5
Water Flow user side	l/h	3173
Water Pressure drops user side	kPa	55
Total Power input	kW	4,4
Total Absorbed Current	A	8,0
Compressor power input	kW	4,2
Compressor absorbed current	A	6,7
EER		4,16
ESEER		3,53
Available pressure head - LP Pumps (option) User side	kPa	78
Max. absorbed current (FLA) [without options]	A	18
Start up current (LRA) [without options]	A	67
Sound power level Lw (base unit)	db(A)	69
Sound pressure level Lp (base unit) @ 10 m Q=2	db(A)	41
Air Flow	m3/h	6939
Number of Fans		2
Fan power input	kW	0,3
Fan absorbed current	A	1,3
Compressors/Circuits		1/1
Buffer tank volume (option)	l	30
Power Supply		400 / 3 / 50
Refrigerant		R410A
Dimensions [LxDxH]	mm	1248 x 564 x 1224
Weight without options	kg	209


#### Notes:

For line dimensioning refer to maximum electric current (FLA/LRA)

**Aalborg:**  
Vissevej 95  
DK-9210 Aalborg  
Tlf.: 98 19 01 66  
aircold@aircold.dk

# Aircold

**København:**  
Vævergangen 18  
DK-2690 Karlslunde  
Tlf.: 70 27 01 66  
aircold@aircold.dk

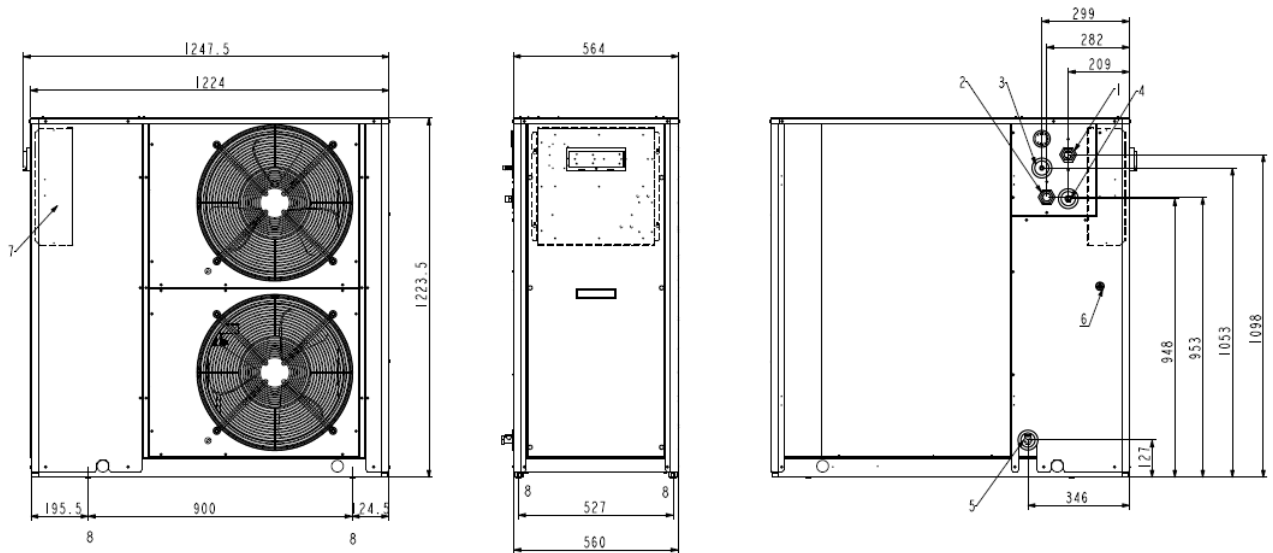

1. Indløb 1 ¼" hun
2. Udløb 1 ¼" hun
3. Afløbsslange sikkerhedsventil
4. ½" (han) påfyldning vand/brine
5. Aftapning ½" hun
6. Forsyning EI Ø28
7. Styring og elboks
8. Antivibration