



Selected model

MPE035-C

Cooling @15/10°C;27°C;

Cooling capacity	kW	42,2
Water Flow user side	l/h	7253
Water Pressure drops user side	kPa	57
Total Power input	kW	10,1
Total Absorbed Current	A	18,7
Compressor power input	kW	9,5
Compressor absorbed current	A	15,2
EER		4,17
ESEER		3,61
Available pressure head - LP Pumps (option) User side	kPa	100
Max. absorbed current (FLA) [without options]	A	38
Start up current (LRA) [without options]	A	162
Sound power level Lw (base unit)	db(A)	73
Sound pressure level Lp (base unit) @ 10 m Q=2	db(A)	45
Air Flow	m3/h	16276
Number of Fans		2
Fan power input	kW	0,6
Fan absorbed current	A	3,5
Compressors/Circuits		1/1
Buffer tank volume (option)	l	125
Power Supply		400 / 3 / 50
Refrigerant		R410A
Dimensions [LxDxH]	mm	1988 x 947 x 1489
Weight without options	kg	390


Notes:

For line dimensioning refer to maximum electric current (FLA/LRA)

Aalborg:
 Vissevej 95
 DK-9210 Aalborg
 Tlf.: 98 19 01 66
 aircold@aircold.dk



København:
 Vævergangen 18
 DK-2690 Karlslunde
 Tlf.: 70 27 01 66
 aircold@aircold.dk

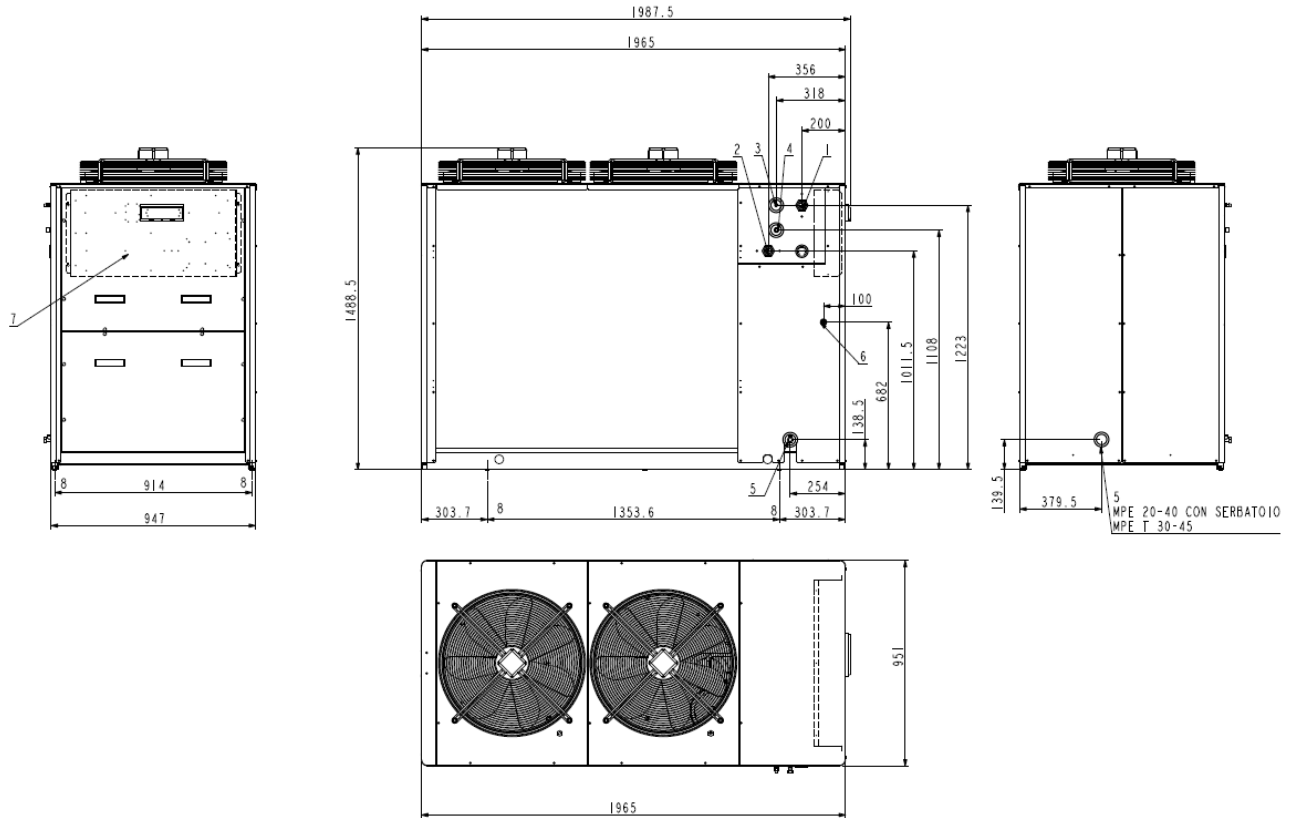

1. Indløb 1 ¼" hun
2. Udløb 1 ¼" hun
3. Afløbsslange sikkerhedsventil
4. ½" (han) påfyldning vand/brine
5. Aftapning ½" hun
6. Forsyning EI Ø37
7. Styling og elboks
8. Antivibration